

Repairing and Outfitting Canoes – Available Parts

New Parts:

New ash and cane seat – 9 ¼" x 21" seat on 41 ½" long supports



New drilled thwart -- 32" x 2 ½", oil finish

New yoke -- 39" x 2 5/8", varnished (No longer available: being fitted with clamps for loan as an extra portaging yoke)

2 New thwarts -- 36" x 2 ½", varnished


New kneeling thwart – 36" x 3", oil finish



Used Parts:

Used, refinished seat frame – 10" x 13" seat on 17 ¼" long supports (shortest dimension), marine varnish
Used, refinished seat frame – 10" x 13" seat on 29" long supports (shortest dimension), marine varnish

Mounting hardware and 45' of 1 ½" wide red, heavyweight polypropylene webbing ¹

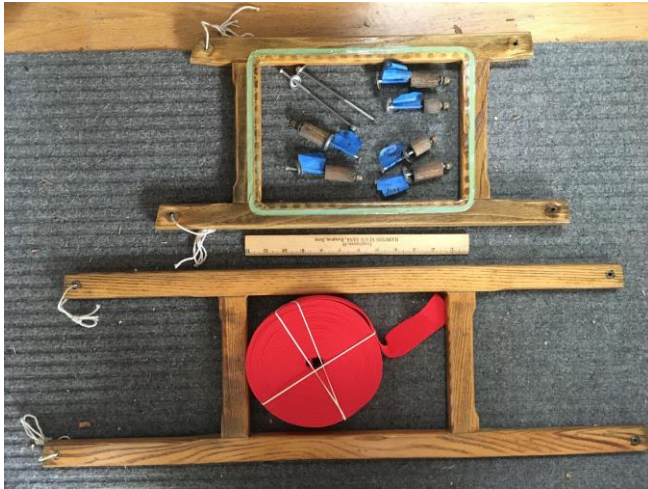

Used yoke – can be cut to good wood at 31 ½" x 2 ¼"

Used thwart – can be cut to good wood at 29 ½" x 2 ¼"



¹ Parts need to complete seat installation: about 6' of 1" webbing and screws and nuts or grommets or staples.